

Total Stations

Model	CX-101	CX-102	CX-103	CX-105	CX-107
Telescope					
Magnification / Resolving power	30x / 2.5"				30x / 3.5"
Others	Length: 171mm (6.7in.), Objective aperture: 45mm (1.8in.) (48mm (1.9in.) for EDM), Image: Erect, Field of view: 1°30' (26m/1,000m), Minimum focus: 1.3m (4.3ft.), Reticle illumination: 5 brightness levels				
Angle measurement					
Display resolution	0.5" / 1" (0.0001 / 0.0002gon, 0.002 / 0.005mil)	1" / 5" (0.0002 / 0.001gon, 0.005 / 0.02mil)			
Accuracy (ISO 17123-3:2001)	1"	2"	3"	5"	7"
IACS (Independent Angle Calibration System)	Provided				
Dual-axis compensator / Collimation compensation	Dual-axis liquid tilt sensor, working range: ±6" (±111mgon) / Collimation compensation available				
Distance measurement					
Laser output ^{*1}	Reflectorless mode: Class 3R / Prism / sheet mode: Class 1				
Measuring range	Reflectorless ^{*3}	0.3 to 500m (1.0 to 1,640ft.)			
(under average conditions ^{*2})	Reflective sheet ^{*4,*5}	RS90N-K: 1.3 to 500m (4.3 to 1,640ft.) RS50N-K: 1.3 to 300m (4.3 to 980ft.), RS10N-K: 1.3 to 100m (4.3 to 320ft.) CP01: 1.3 to 2,500m (8,200ft.), OR1PA: 1.3 to 500m (1,640ft.) One AP prism: 1.3 to 4,000m (4.3 to 13,120ft.) / Under good conditions ^{*6} : 5,000m (16,400ft.) Three AP prisms: to 5,000m (16,400ft.) / Under good conditions ^{*6} : to 6,000m (19,680ft.)			
Display resolution	Fine/Rapid: 0.001m / 0.01ft. / 1/8in. Tracking: 0.01m / 0.1ft. / 1/2in.				
Accuracy ^{*7}	Reflectorless ^{*3}	(3 + 2ppm x D) mm ^{*7}			
(ISO 17123-4:2001)	Reflective sheet ^{*4}	(3 + 2ppm x D) mm			
(D=measuring distance in mm)	AP/CP prism	(2 + 2ppm x D) mm			
Measuring time ^{*8}	Fine: 0.9s (initial 1.7s), Rapid: 0.7s (initial 1.4s), Tracking: 0.3s (initial 1.4s)				
Interface and Data management					
Display / Keyboard	Graphic LCD, 192 x 80 dots, backlight, contrast adjustment / Alphanumeric keyboard / 25 keys with backlight				
Control panel location ^{*9}	On both faces				On one face
Trigger key	On right instrument support				
Data storage	Internal memory	Approx. 10,000 points			
	Plug-in memory device	USB flash memory (max. 8GB)			
Interface	Serial RS-232C, USB2.0 (Type A, for USB flash memory)				
Bluetooth modem (factory option) ^{*10}	Bluetooth Class 1, Ver.2.1+EDR, Operating range: up to 300m (980ft.) ^{*11}				
General					
Laser pointer ^{*12}	Coaxial red laser using EDM beam				
Guide light ^{*12}	Green LED (524nm) and Red LED (626nm), Operating range: 1.3 to 150m (4.3 to 490ft.)				
Levels	Graphic	6" (Inner Circle)			
	Circular level	10' / 2mm			
Optical plummet	Magnification: 3x, Minimum focus: 0.3m (11.8in.) from tribrach bottom				
Laser plummet (option)	Red laser diode (635nm±10nm), Beam accuracy: ≤ 1.0mm@1.3m, Class 2 laser product				
Dust and water protection	IP66 (IEC 60529:2001)				
Operating temperature ^{*13}	-20 to +50°C (-4 to +122°F)				
Size with handle ^{*8}	Control panel on both faces: W191 x D181 x H348mm (W7.5 x D7.1 x H13.7in.) Control panel on one face: W191 x D174 x H348mm (W7.5 x D6.9 x H13.7in.)				
Weight with handle and battery	Approx. 5.6kg (12.3 lb.)				
Power supply					
Battery	BDC70 detachable battery	Li-ion rechargeable battery			
Operating time (20°C)	BDC70	Approx. 36 hours (single distance measurement every 30 seconds)			
	External battery (option)	BDC60: approx. 44 hours, BDC61: approx. 89 hours (single distance measurement every 30 seconds)			

*1 IEC60825-1:Ed.2.0:2007 / FDA CDRH 21 CFR Part 1040.10 and 11 *2 Average conditions: Slight haze, visibility about 20km (12 miles), sunny periods, weak scintillation. *3 With Kodak Gray Card White Side (90% reflective). When brightness on measured surface is 30,000 lx. or less. Reflectorless range/accuracy may vary according to measuring objects, observation situations and environmental conditions. *4 When the measuring beam's incidence angle is within 30° in relation to the reflective sheet target. *5 Measuring range in temperatures of -30 to -20°C (-22 to -4°F) with Low Temperature models and 50 to 60°C (122 to 140°F) with High Temperature models: RS90N-K: 1.3 to 300m (4.3 to 980ft.), RS50N-K: 1.3 to 180m (4.3 to 590ft.), RS10N-K: 1.3 to 60m (4.3 to 190ft.) *6 Good conditions: No haze, visibility about 40km (25 miles), overcast, no scintillation. *7 Measuring range: 0.3 to 200m *8 Typical, under good conditions. Reflectorless measurement time may vary according to measuring objects, observation situations and environmental conditions. *9 Control panel location may vary depending on region or model. *10 Usage approval of Bluetooth wireless technology varies according to country. Please consult your local office or representative in advance. *11 No obstacles, few vehicles or sources of radio emissions/interference in the near vicinity of the instrument, no rain. *12 The laser-pointer and the guide light do not work simultaneously. *13 Low Temperature models: -30 to 50 °C (-22 to 122°F) and High Temperature models: -20 to 60°C (-4 to 140°F, No direct sunlight) are available on built-to-order basis.

Standard Accessories

- CX main unit ● Battery (BDC70) ● Battery charger (CDC68) ● Power Cable ● Lens cap ● Lens hood ● Tool pouch
- Screwdriver ● Lens brush ● Adjusting pin x2 ● Cleaning cloth ● Operation manual ● USB memory ● Laser caution sign-board
- Carrying case ● Carrying strap



TOPCON CORPORATION
75-1 Hasunuma-cho, Itabashi-ku, Tokyo 174-8580, Japan
Phone: (+81)3-3558-2993 Fax: (+81)3-3960-4214
www.topcon.co.jp

TOPCON SOKKIA INDIA PVT. LTD.
C-25, GROUND FLOOR, SECTOR-8,
NOIDA, U.P. - 201 301
www.topconsokkia.ind.in

Your local Authorized Dealer is:



Specifications subject to change without notice
©2011 Topcon Corporation All rights reserved. P-138-1-ME



CX Series
Reflectorless Total Stations

Tradition Meets Innovation

- LongLink Data Communication^{*1}
- Advanced Angle Measurement System
- The Longest^{*2} Battery Life — 36 Hours!
- Waterproof, Rugged, and Operator Friendly

*1 Factory option
*2 As of December, 2011.




• Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Topcon is under license. Other trademarks and trade names are those of their respective owners.
• Designs and specifications are subject to change without notice.
• Product colors in this brochure may vary slightly from those of the actual products owing to limitations of the printing process.

The All New Sokkia CX : Inspired by Tradition, Ready for the Future.

RED-tech Technology Reflectorless EDM




- Fast distance measurement of 0.9s regardless of object.
- SOKKIA traditional pinpoint precision in reflectorless distance
- Reflectorless operation from 30cm to 500m.
- Coaxial EDM beam and laser-pointer provide fast and accurate aiming.
- Ensures accuracy even with reflective sheets.

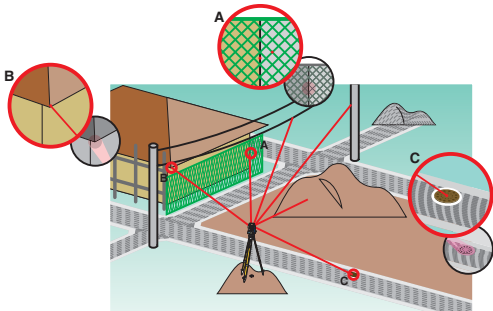

The ultra-narrow EDM beam can precisely measure walls, corners, manholes on the road surface, even chain-link fences and tree branches.


LongLink Data Communication*

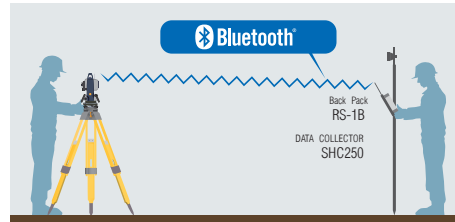

- The CX series of total stations features **Bluetooth®** Class 1 wireless technology for reliable data communications.
 - All CX data is instantly available at the Bluetooth-equipped controller.
- *Offered as factory option.

Advanced Angle Measurement System

- CX features SOKKIA's original absolute encoders that provide long-term reliability in any job site condition. Dual-axis compensator ensures stable measurements even when setup on uneven terrain.
- Sokkia's traditional motion clamp and tangent screw are employed to ensure stable angle measurement.
- CX101 and CX102 feature groundbreaking IACS (Independent Angle Calibration System) technology for extremely reliable angle measurement.



The Longest*¹ Battery Life – 36 Hours!

- The CX single battery can last up to 36 hours.²
- Greatly reduces likelihood of low power during any full-days work.
- Eliminates the need for nightly recharging or carrying extra batteries.



*¹ As of December, 2011.

*² Operating time will vary depending upon environmental conditions and CX activity.


Waterproof, Rugged, and Operator Friendly

- IP66 dustproof / waterproof rating.
- Metal chassis and heavy duty handle add ruggedness.
- Standard usage temperature range -20° to +50°C. Low temperature models can be used as low as -30** and high temperature models up to +60°C.*



* Low and High temperature models available as options.

Operating temperature range



- USB TypeA port for convenient added memory. Use of included USB accessory assures IP66 protection.



- One-touch star key [★] offers instant access to functions.



- Conveniently located "trigger" key lets you take a series of measurements with the push of a button without taking your eye off the telescope.



- Control panel features large 10-key pad with LCD that provides optimum viewing and convenience.*



*Control panel location may vary depending on region or model.

- Green/red telescope guide light enhances work efficiency in a range up to 150m.



- Built-in laser plummet with five brightness levels is equipped for quick instrument setting in all lighting conditions.*

*Offered as an option in some areas.

